

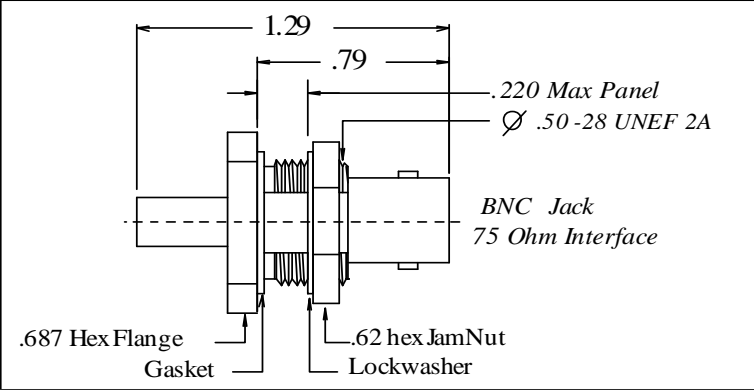


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>190728</b>
	Approved 	Date 08/22/02
	Distribution : USER	Rev. 3 (05/29/13) Uncontrolled Document

**BNC Bulkhead Jack**  
for V75268, V76261, V73263



**PERFORMANCE**

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

.69 ounces (19.56 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

**Crimp Tooling:**

*Center Contact* M22520 / 2 - 01 Tool,  
Selector Dial @ # 5  
Recommended Positioner:  
PIC 110202 (Daniels K1301)

*Crimp Ferrule* M22520 / 5 - 01 Tool,  
M22520 / 5-41, B Hex Crimp Die  
(.178 hex). PIC P/N 110333

**CONSTRUCTION**

***Materials:***

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft,
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

***Finish :***

Body, Ferrule	Nickel
Center Contact	Gold

***Applicable Standards***

MIL-STD 348  
MIL-PRF-39012

***Notes :***

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.