

PIC Wire & Cable*A Division of the Angelus Corporation*

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

Connector Specification**P/N 190764**

Approved :

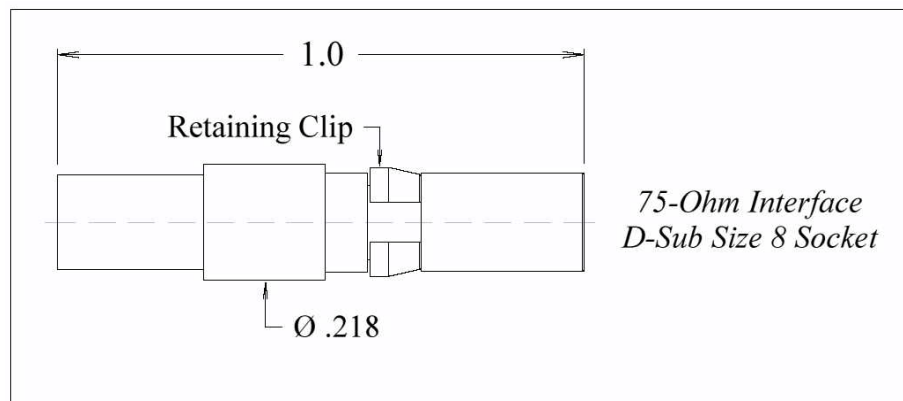


Date : 12/12/12

Rev. 4 (10/15/18)

Distribution : USER

Uncontrolled if Printed

D-Sub Size 8 Socket (Receptacle) Contact - 75 Ohm Interface*for V73263 / V75268 / V76261***Caution: For use only with 75 Ohm Interface mating contact P/N 190763 ONLY.****PERFORMANCE**

Impedance :	75 Ohms
Frequency Range :	0 - 3 GHz
Insertion Loss :	0.5 dB max @ 3 GHz
Voltage Rating :	1000 V (rms)
Insulation Resistance :	5000 Megohms min.
DW Voltage :	1500 V(rms)

CONNECTOR WEIGHT (Each)

.101 ounces (2.88 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION (Tooling)**Center Contact**

M22520 / 2 - 01 Tool, Dial Setting @ # 4

Recommended Positioner :

PIC P/N 110754, (Daniels # K1887)

Crimp Ferrule

M22520 / 5 - 01 Tool

Die Set:

PIC P/N 110376, (Daniels # Y187)

Cavity B (.156" hex)

CONSTRUCTION**Materials:**

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	PTFE Fluorocarbon, ASTM-D1457
Clip Ring	Beryllium Copper, ASTM-B194

Finish :

Body, Contact, Ferrule	Gold, MIL-G-45204
Clip Ring	Nickel, QQ-N-290

APPLICABLE STANDARDS

DSCC Specification 89059

Notes :

1) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.

2) Recommended Removal Tools :

Palco P/N T0100-K, Positronics P/N 4311-0-0-0,
or ITT P/N CET-C6B