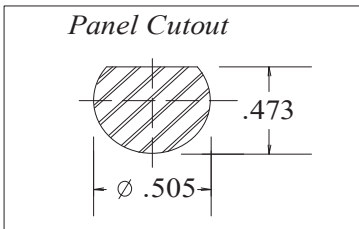
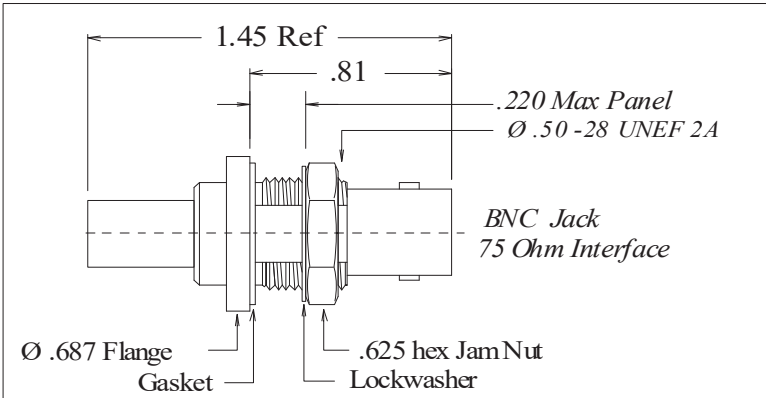


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089		Connector Specification Approved  Distribution : USER		190928 Date 05/20/10 Rev. 2 (06/11/13) Uncontrolled Document
BNC Bulkhead Jack for V78209 				
PERFORMANCE		CONSTRUCTION		
Nominal Impedance	75 Ohms	Materials:		
Frequency Range	0 - 3 GHz	Body	Brass, ASTM-B16	
Voltage Rating	500 VRMS	Center Contact	Beryllium Copper, ASTM-B196	
Insulation Resistance	5000 Megohms	Ferrule	Copper, Alloy 122	
		Dielectric	TFE Fluorocarbon, ASTM-D4894	
		Lock Washer	Phosphor Bronze, QQ-B-750	
		Gasket	Silicone Rubber, ZZ-R-765	
CONNECTOR WEIGHT (Each)		Finish :		
0.66 ounces (18.65 grams)		Body, Ferrule	Nickel	
		Center Contact	Gold	
RoHS COMPLIANT		Applicable Standards		
Complies to RoHS Standards		MIL-STD 348		
		MIL-PRF-39012		
INSTALLATION		Notes :		
Recommended Jam Nut Torque - 35 to 40 in. lbs.		1) Please refer to T-1909XX Termination Instruction sheet for strip dimensions & instructions.		
Crimp Tooling:				
Center Contact	M22520 / 1 - 01 Tool, Selector Dial @ # 3 Recommended Positioner : PIC # 110656 (Daniels # TH729), Selector @ Green			
Crimp Ferrule	M22520 / 5 - 01 Tool, Die Set M22520 / 5 - 59 , PIC P/N 110697 Cavity A (.255" hex)			
PIC Wire & Cable Connector User specification sheets are non-controlled documents. Please contact PIC Wire and Cable or visit the PIC website (www.picwire.com) to ensure the latest revision of the drawing is being viewed.				