
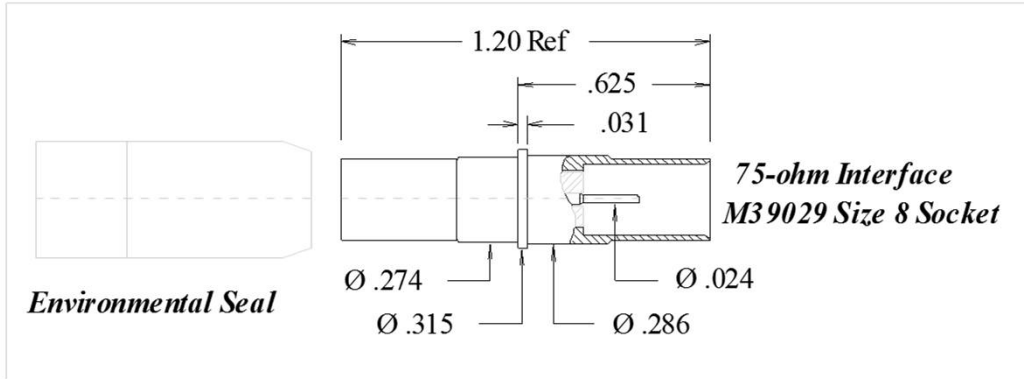


PIC Wire & Cable	Connector Specification	P/N 190941-01
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 05/13/10
	Distribution : USER	Rev : 5 (06/05/18)
		Uncontrolled if Printed

M39029 Size 8 Coaxial Socket Contact w/ Environmental Seal - 75 Ohm Interface*
For PIC Coax Cable P/N V78209



PERFORMANCE

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	325 VRMS
Insulation Resistance	5000 Megohms

CONNECTOR WEIGHT (each)

0.17 ounces (4.83 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Crimp Tooling:

<i>Center Contact</i>	M22520 / 1 - 01 Tool, Selector Dial @ # 4 Recommended Positioner : PIC # 110657 (Daniels # TP1681)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, with M22520 / 5 - 45 Hex Crimp Die, cavity A (.231" hex)

CONSTRUCTION

Materials:

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft,
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Environmental Seal	Thermoplastic & Elastomer

Finish :

Body, Ferrule	Gold
Center Contact	Gold

APPLICABLE STANDARDS

MIL-C-38999, Series I, III & IV

***CAUTION : Approved for use ONLY with mating 75**

Ohm Interface M39029 Size 8 Sockets:

**PIC # 190740, 190740-01,
PIC # 190940, 190940-01**

Notes :

- 1) Please refer to T-1909XX Termination Instruction sheet for strip dimensions & instructions.
- 2) Removal Tool P/N M81969/14-12