


AIS-1000 RF CABLE WORKSHEET

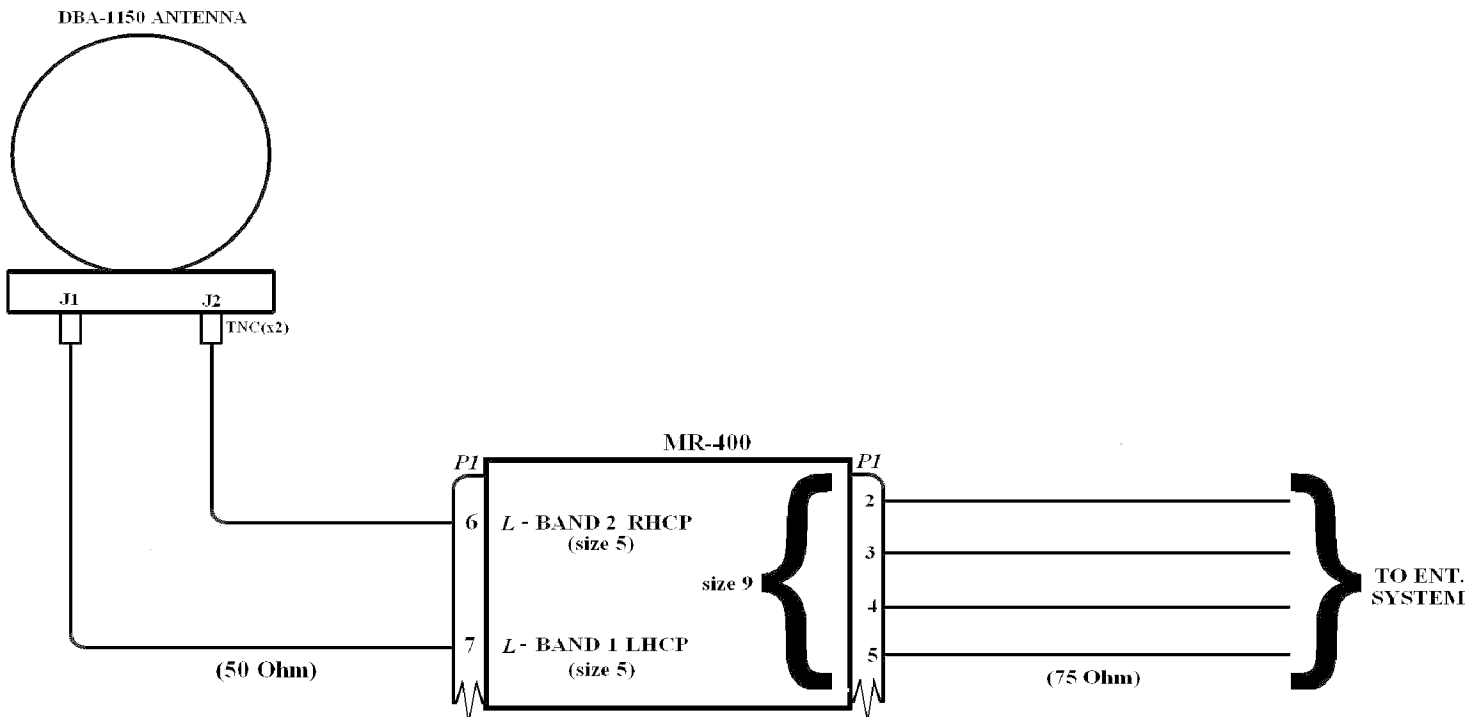

ANT. to MR-400 INFO:

ANTENNA CABLE LENGTH : _____

CONN. ANGLE @ ANT. : _____

MR-400 to Ent. System INFO :

CABLE LENGTH : _____

CONN. ANGLE @ Ent System : _____

Cable (Test) Requirements :

ANT to MR-400 : Insertion loss: Document loss of each cable from 950 to 1450 MHz.
(RG-400 or Equiv.)

VSWR: 1.43:1 max for each cable

MR-400 to Ent. System : Insertion loss: 10 dB max for each cable from 950 to 1450 MHz.
(4-75 Ohm Cables)

VSWR: 1.43:1 max for each cable

LABELING: Standard labeling is P/N, S/N and connection Info.

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____