


SAT-2000 SATCOM RF CABLE WORKSHEET

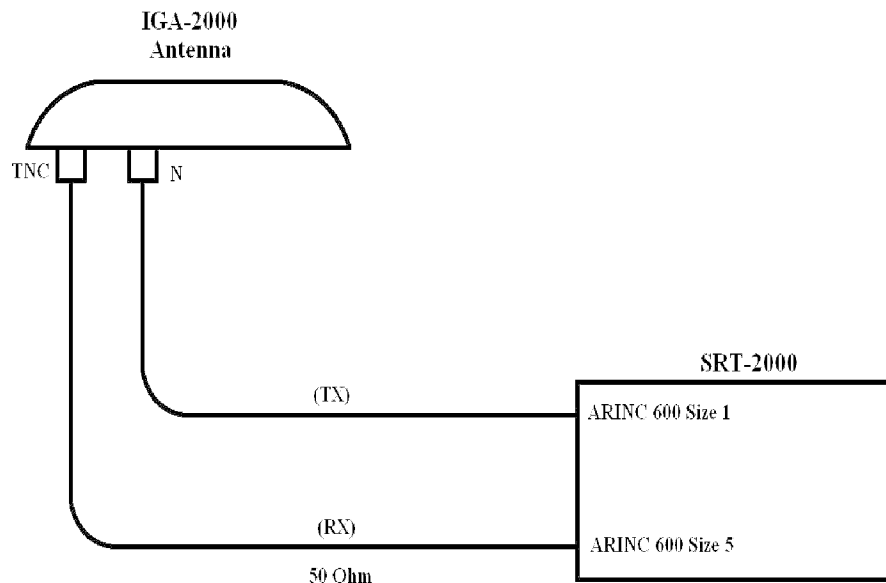

Cable (Test) Requirements :

Insertion Loss: 1.4 dB Max for TX cable @ 1.6 GHz.

Insertion Loss: 6 to 25 dB for RX cable @ 1.5 GHz.

VSWR: 1.5:1 Max for each antenna cable.

ANT. CABLING INFO:

ANT. to LRU CABLE LENGTH : _____


CONN. ANGLE @ LRU : _____

LABELING: Standard labeling is P/N, S/N & connection Info.

Connector Orientation

(Assemblies \leq 20 ft with (2) 90° Connectors)

Configuration Depicted : End B is **3:00 or 90°** from end A.

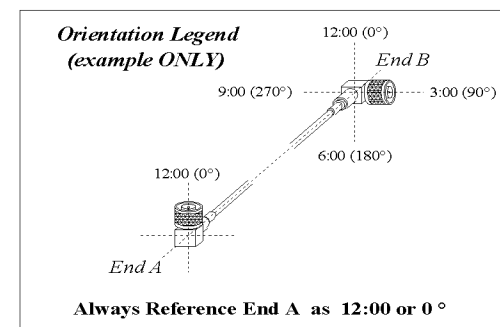

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____