

A Division of the Angelus Corporation

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

N220 W1051 Springdale Road, Waukesha, WI 53186

Approved :

PFT

Date :

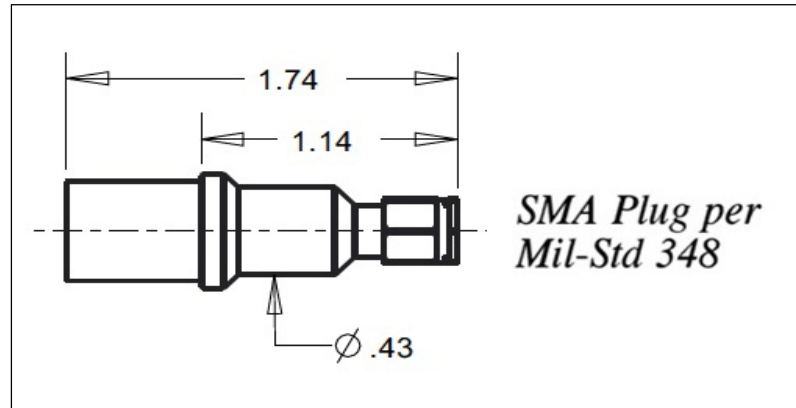
07/07/16

Rev. 5

(05/10/22)

Distribution : USER

Uncontrolled if Printed

SMA (50 Ohm) Straight Plug*for UH22089**Features Not Shown : Safety Wire Holes, Gasket in Front***PERFORMANCE**

Nominal Impedance :	50 Ohms
Frequency Range :	0 - 12 GHz
Voltage Rating :	335 V(rms)
Insulation Resistance :	5000 Megohms
DW Voltage :	750 V (rms)
Insertion Loss (max) :	0.20 dB max @ 12 GHz
Insertion Loss :	0.06 $\sqrt{F(\text{GHz})}$
Temperature Rating :	-65° to +165° C

CONNECTOR WEIGHT (Each)

0.63 ounces (17.80 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Center Contact**

Solder Only

Crimp Ferrule

M22520 / 5-01 Tool

M22520 / 5-25 Die Set

(.429" A hex)

CONSTRUCTION**Materials:**

Body	Stainless Steel, ASTM-A582, Alloy UNS S30300
Cable Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Tellurium Copper, ASTM-B301, C14500, H02 Or Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Or Copper, ASTM-B152, Alloy C12200
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Gasket	Silicone Rubber

Finish :

Body	Passivated
Ferrule	Nickel
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD 348, MIL-PRF-39012

Notes :

1) A 2.0" piece of Raychem ATUM heat shrink
P/N ATUM-16/4-0 provided with connector for
purpose of strain relief & moisture protection.

2) Please refer to T-1504XX Termination Instruction
sheet for strip dimensions & instructions.