

PIC Wire & Cable

A Division of the Angelus Corporation
PH (262) 246-0500 Fax (262) 246-0450 www.picwire.com
PO Box 330 Sussex, WI 53089

Termination Instructions

T-110718

Approved : *TJH*

Date : 08/07/13

Distribution : USER

Rev. 0

Uncontrolled if Printed

Termination Instructions for PIC P/N 110718, HD-BNC Straight Plug connector (for PIC V78209 Coax Cable)

Recommended Hand Tools :	X-acto Knife, Sharp Razor, Wire Cutters
Required Cable Tools :	M22520 / 5- 01 Hex Crimp Tool M22520 / 5- 59 Die Set cav. A (.255" hex) Soldering equipment, <i>OR</i> Daniels # Y1833P Die Set (.042" square crimp)

- 1) Install ATUM 8/2 Dual Wall Shrink Tube x 1.5" onto the cable. Install the crimp ferrule onto the cable. Make Cut A @ .220" from cable end, through the jacket, wire braids, and foil (Fig. 1). Do not cut into dielectric. Remove jacket, wire braids, and foil.
- 2) Make Cut B @ .590" from the cable end, through the jacket only (Fig. 1). Do Not nick or cut into the wire braids. Leave the jacket on.
- 3) Make Cut C @ .170" from the cable end, through the dielectric (Fig 1). Do Not nick or cut into the center conductor. Remove the dielectric, verify center conductor integrity.
- 4) Verify proper fit of the center contact onto the stranded center conductor, with all strands intact. Solder or crimp the center contact onto cable center conductor (Fig. 2). If crimping, use .042" square crimp cavity (Daniels # Y1833P Die Set w/ M22520/5-01 crimp tool).
- 5) Remove jacket at Cut B. Flare the wire braids away from the cable. Slit the foil lengthwise in three or four places around the cable, and flare the foil out to expose the dielectric (Fig. 3) all the way down to the bottom. The dielectric must be exposed for the full length of the Strip Dimension (to Cut B).
- 6) Inspect and clean the dielectric as needed, prior to installing the connector body onto the cable. Inspect and clean Connector Body entry as needed.
- 7) Install the connector body over the dielectric and under the flared shields, until the center contact snaps into the connector's internal captivation.
- 8) Smooth all braids down over the rear of the connector body, covering the knurl. Trim off any excess braids past the knurled rear body, trim even with the shoulder (Fig. 4).
- 9) Pull the crimp ferrule up over the braids. Secure the body while positioning the ferrule, to avoid shifting the center conductor. Trim any stray braids at the shoulder prior to seating the ferrule against the connector body.
- 10) Verify that the connector is fully seated onto the cable. Crimp the ferrule with the M22520 / 5 -01 hex crimp tool, using the M22520 / 5 - 59 hex crimp die set, cavity A (.255" hex).
- 11) Shrink the ATUM 8/2 dual wall shrink tube, starting approximately .125" behind the HD-BNC coupling nut, covering the rear of the connector body, and onto the cable (Fig 5).

Dimensions in Inches (Not To Scale)

Figure 1

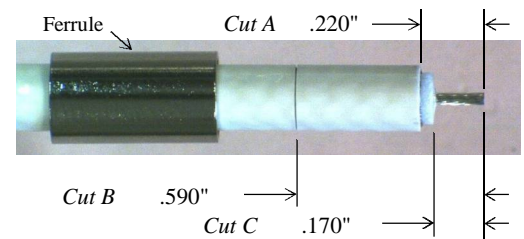


Figure 2

Solder or crimp center contact



Figure 3

Remove jacket, flare shields



Figure 4

Lay braids flat



Trim braids even w/ shoulder

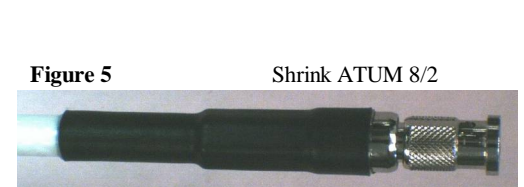


Figure 5

Shrink ATUM 8/2

Note: Connector Length added to cable = .610" nominal