


GARMIN GTS 800 (BTM MONOPOLE) RF CABLE WORKSHEET

Cable (Test) Requirements :

Insertion Loss : 2.5 dB Max @ 1.09 GHz each cable. 1.5 dB max using low profile dir. ant.

VSWR : 1.5:1 max @ 1.09 GHz for each ant. cable.

Note: 4 Upper antenna cables to be the exact same length.

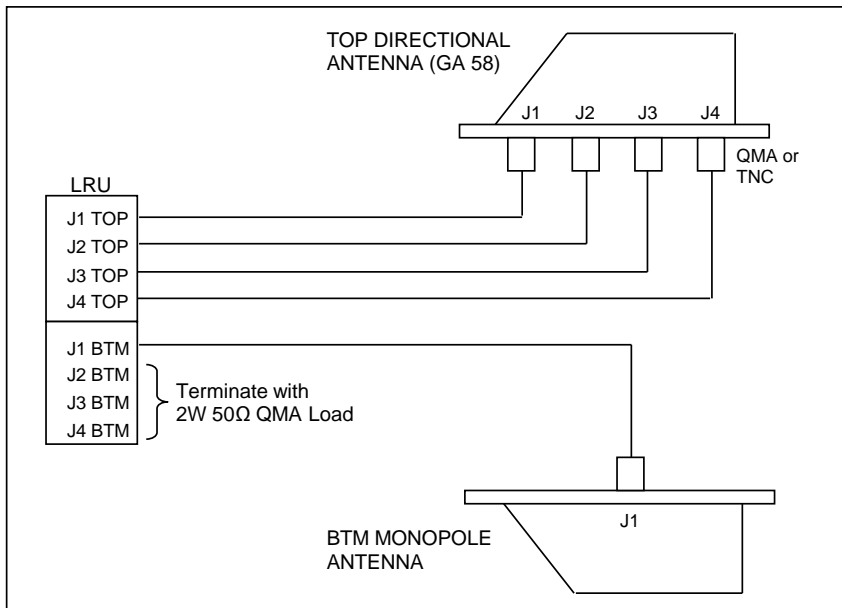

UPPER ANT. CABLE INFO:

UPPER ANT. CABLE LENGTHS : _____

CONN. ANGLE/TYPE @ UPR ANT: _____

CONN. ANGLE @ LRU : _____

CONN. ORIENTATION:
(See Below) _____

LOWER ANT. CABLE INFO:

LOWER ANT. CABLE LENGTH : _____

CONN. ANGLE/TYPE @ LWR ANT: _____

CONN. ANGLES @ LRU : _____

CONN. ORIENTATION:
(See Conn Orin. Below) _____

NOTE: DRAW LINE FOR DISC. & SPECIFY LENGHTS & CONN TYPES ON DWG TO LEFT.

QTY OF KITS: _____ (5 cables ea)

SPECIAL LABELING: PLEASE SPECIFY

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____

Connector Orientation

(Assemblies with (2) 90° Connectors)

Configuration Depicted : End B is **3:00 or 90°** from end A.

